



深沟球轴承

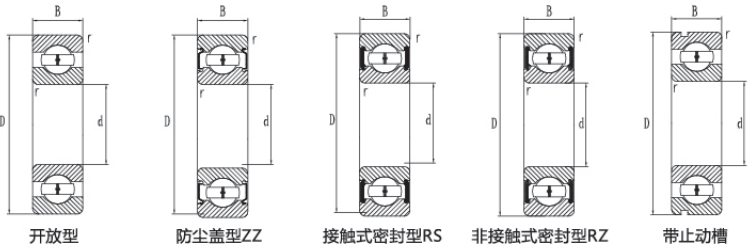

(d25~45mm)


基本尺寸(mm)			倒角尺寸	基本额定负荷KN		极限转速 r/min		质量	公称型号
d	D	B	min	Cr	COr	油润滑	脂润滑	Kg	
25	62	17	1.1	22.5	11.72	14000	12000	0.23	6305
	80	21	1.5	34.5	17.50	12000	10000	0.53	6405
	47	8	0.3	8.4	5.10	18000	15000	0.06	16005
	37	7	0.3	4.3	2.59	21000	18000	0.022	6805
	42	9	0.3	7.0	4.64	19000	16000	0.045	6905
30	55	13	1	13.1	8.47	15000	12400	0.12	6006
	62	16	1	19.3	11.31	13000	11000	0.2	6206
	72	19	1.1	26.7	15.00	12000	10000	0.35	6306
	90	23	1.5	43.5	23.90	10000	88000	0.74	6406
	55	9	0.3	11.2	7.35	15000	13000	0.085	16006
35	42	7	0.3	4.7	3.65	18000	15000	0.027	6806
	47	9	0.3	7.3	5.00	17000	14000	0.051	6906
40	62	14	1	16.0	10.30	14000	12000	0.16	6007
	72	17	1.1	25.7	15.30	11000	9800	0.29	6207
	80	21	1.5	33.5	19.10	10000	8800	0.46	6307
45	100	25	1.5	55.0	31.00	9100	7800	0.95	6407
	62	9	0.3	11.7	8.20	14000	12000	0.11	16007
50	47	7	0.3	4.9	4.05	16000	13000	0.03	6807
	55	10	0.6	9.6	6.85	15000	12000	0.08	6907
55	68	15	1	16.8	11.50	12000	10000	0.19	6008
	80	18	1.1	29.1	17.80	10000	8700	0.37	6208
	90	23	1.5	40.6	24.00	9200	7800	0.63	6308
	110	27	2	63.5	36.50	7800	6900	1.25	6408
	68	9	0.3	12.6	9.65	12000	10000	0.13	16008
60	52	7	0.3	5.1	4.40	14000	12000	0.034	6808
	62	12	0.6	12.2	8.90	13000	11000	0.12	6908
65	75	16	1	21.0	15.10	11000	9200	0.25	6009
	85	19	1.1	32.5	20.40	9200	7800	0.41	6209
	100	25	1.5	53.0	32.00	8200	7000	0.83	6309
70	120	29	2	77.0	45.00	7300	6500	1.55	6409
	75	10	0.6	12.9	10.50	11000	9200	0.17	16009
	58	7	0.3	5.4	4.95	12000	11000	0.04	6809

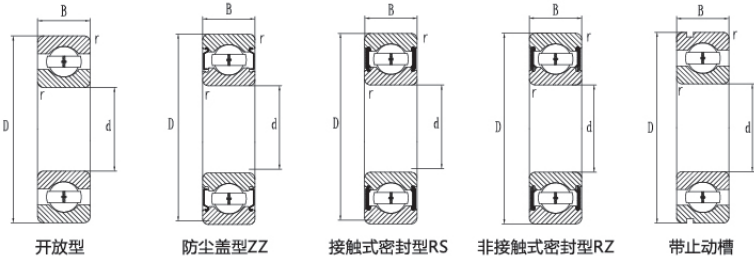

Open type, shield type ZZ, contact-sealed type RS, non-contact-sealed type RZ, with snap-ring groove

(d10~25mm)


(d10~25mm)		Chamfer dimension		Basic rated load KN		Limiting Speed		weight	Model Name
basic size	基本尺寸(mm)		倒角尺寸	基本额定负荷KN		极限转速 r/min		质量 Kg	公称型号
d	D	B	min	Cr	C _{or}	油润滑	脂润滑		
10	26	8	0.3	4.55	1.97	34000	29000	0.019	6000
	30	9	0.6	5.1	2.38	30000	25000	0.032	6200
	35	11	0.6	8.2	3.43	27000	23000	0.053	6300
	19	5	0.3	1.4	0.85	38000	32000	0.0055	6800
	22	6	0.3	2.1	1.19	36000	30000	0.01	6900
12	28	8	0.3	5.12	2.41	30000	26000	0.022	6001
	32	10	0.6	6.1	2.75	26000	22000	0.037	6201
	37	12	1	9.7	4.19	24000	20000	0.06	6301
	21	5	0.3	1.9	1.04	35000	29000	0.0063	6801
	24	6	0.3	2.9	1.46	32000	27000	0.011	6901
15	32	9	0.3	5.60	2.83	26000	22000	0.03	6002
	35	11	0.6	7.8	3.60	23000	19000	0.045	6202
	42	13	1	11.4	5.45	21000	17000	0.082	6302
	32	8	0.3	5.6	2.83	26000	24000	0.025	16002
	24	5	0.3	2.1	1.26	31000	26000	0.0074	6802
	28	7	0.3	3.7	2.00	28000	24000	0.016	6902
17	35	10	0.3	6.80	3.35	24000	2000	0.039	6003
	40	12	0.6	9.6	4.60	21000	18000	0.065	6203
	47	14	1	13.5	6.55	19000	16000	0.12	6303
	62	17	1.1	22.7	10.80	16000	14000	0.27	6403
	35	8	0.3	6.8	3.35	24000	20000	0.032	16003
	26	5	0.3	2.2	1.46	28000	24000	0.0082	6803
	30	7	0.3	4.7	2.58	26000	22000	0.018	6903
20	42	12	0.6	9.40	5.05	21000	18000	0.069	6004
	47	14	1	13.5	6.55	18000	16000	0.11	6204
	52	15	1.1	15.9	7.90	17000	14000	0.14	6304
	72	19	1.1	28.5	13.90	14000	12000	0.4	6404
	42	8	0.3	7.9	4.50	21000	18000	0.05	16004
	32	7	0.3	4.0	2.47	25000	21000	0.018	6804
	37	9	0.3	6.4	3.70	23000	19000	0.038	6904
25	47	12	0.6	10.1	5.85	18000	15000	0.08	6005
	52	15	1	14.1	7.88	15000	13900	0.13	6205

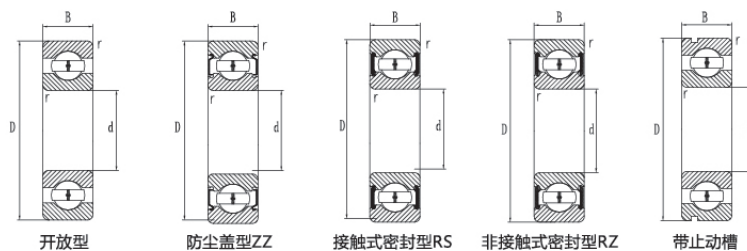

(d55~80mm)


基本尺寸(mm)			倒角尺寸	基本额定负荷KN		极限转速 r/min		质量	公称型号
d	D	B	min	Cr	COr	油润滑	脂润滑	Kg	
45	68	12	0.6	13.1	10.40	12000	9800	0.14	6909
50	80	16	1	21.8	16.60	10000	8500	0.26	6010
	90	20	1.1	35.0	23.20	8300	7100	0.46	6210
	110	27	2	62.0	38.50	7500	6400	1.05	6310
	130	31	2.1	83.0	49.50	6700	5700	1.9	6410
	80	10	0.6	13.2	11.30	10000	8500	0.18	16010
	65	7	0.3	6.6	6.10	11000	9600	0.052	6810
	72	12	0.6	13.4	11.20	11000	9000	0.14	6910
55	90	18	1.1	28.3	21.20	9000	7700	0.39	6011
	100	21	1.5	43.5	29.20	7600	6400	0.61	6211
	120	29	2	71.5	45.00	6800	5800	1.35	6311
	140	33	2.1	89.0	54.00	6100	5200	2.3	6411
	90	11	0.6	20.2	13.87	8500	7500	0.26	16011
	72	9	0.3	8.8	8.10	10000	8700	0.083	6811
	80	13	1	16.0	13.30	9600	8200	0.19	6911
60	95	18	1.1	29.5	23.20	8300	7000	0.42	6012
	110	22	1.5	52.5	36.00	7000	6000	0.78	6212
	130	31	2.1	82.0	52.00	6300	5400	1.7	6312
	150	35	2.1	102	64.50	5700	4800	2.75	6412
	95	11	0.6	20.0	17.50	8300	7000	0.28	16012
	78	10	0.3	11.5	10.60	9400	8000	0.11	6812
	85	13	1	16.4	14.30	8900	7600	0.2	6912
65	100	18	1.1	30.5	25.20	7700	6500	0.44	6013
	120	23	1.5	57.5	40.00	6500	5500	0.99	6213
	140	33	2.1	92.5	60.00	5800	4900	2.1	6313
	160	37	2.1	111	72.50	5200	4400	3.3	6413
	100	11	0.6	20.5	18.70	7700	6500	0.3	16013
	85	10	0.6	11.6	11.00	8700	7400	0.13	6813
	90	13	1	17.4	16.10	8200	7000	0.22	6913
70	110	20	1.1	38.0	31.00	7100	6100	0.6	6014
	125	24	1.5	62.0	44.00	6000	5100	1.05	6214
	150	35	2.1	104	68.00	5400	4600	2.5	6314

深沟球轴承

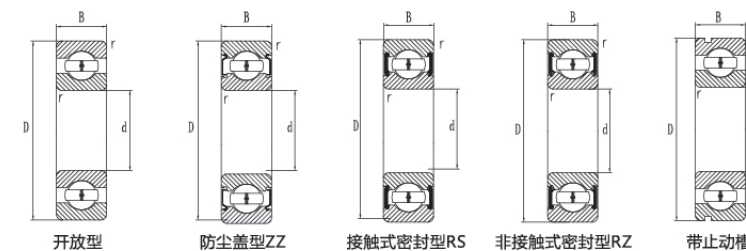

(d70~95mm)

基本尺寸(mm)			倒角尺寸	基本额定负荷KN		极限转速 r/min		质量	公称型号
d	D	B	min	Cr	COr	油润滑	脂润滑	Kg	
70	180	42	3	128	89.50	4800	4100	4.85	6414
	110	13	0.6	24.4	22.60	7100	6100	0.43	16014
	90	10	0.6	12.1	11.90	8100	6900	0.14	6814
	100	16	1	23.7	21.20	7700	6500	0.35	6914
75	115	20	1.1	39.5	33.50	6700	5700	0.64	6015
	130	25	1.5	66.0	49.50	5600	4800	1.2	6215
	160	37	2.1	113	77.00	5000	4300	3	6315
	190	45	3	138	99.00	4500	3800	6.8	6415
	115	13	0.6	25.0	24.00	6700	5700	0.46	16015
	95	10	0.6	12.5	12.90	7600	6400	0.15	6815
	105	16	1	24.4	22.60	7200	6100	0.37	6915
80	125	22	1.1	47.5	40.00	6200	5300	0.85	6016
	140	26	2	72.5	53.00	5300	4500	1.4	6216
	170	39	2.1	123	86.50	4700	4000	3.6	6316
	200	48	3	164	125.00	4200	3600	8	6416
	125	14	0.6	25.4	25.10	6200	5300	0.6	16016
	100	10	0.6	12.7	13.30	7100	6000	0.15	6816
	110	16	1	24.9	24.00	6700	5700	0.4	6916
85	130	22	1.1	49.5	43.00	5900	5000	0.89	6017
	150	28	2	83.5	64.00	5000	4200	1.8	6217
	180	41	3	133	97.00	4500	3800	4.25	6317
	130	14	0.6	25.9	26.20	5900	5000	0.63	16017
	110	13	1	18.7	19.00	6700	5700	0.27	6817
	120	18	1.1	32.0	29.60	6300	5400	0.55	6917
90	140	24	1.5	58.0	49.50	5600	4700	1.15	6018
	160	30	2	96	91.50	4700	4000	2.15	6218
	190	43	3	143	107.00	4200	3600	4.9	6318
	140	16	1.1	33.5	33.50	5600	4700	0.85	16018
	115	13	1	19.0	19.70	6300	5400	0.28	6818
	125	18	1.1	33.0	31.50	6000	5100	0.59	6918
95	145	24	1.5	60.5	54.00	5300	4500	1.2	6019
	170	32	2.1	109	82.00	4400	3700	2.6	6219

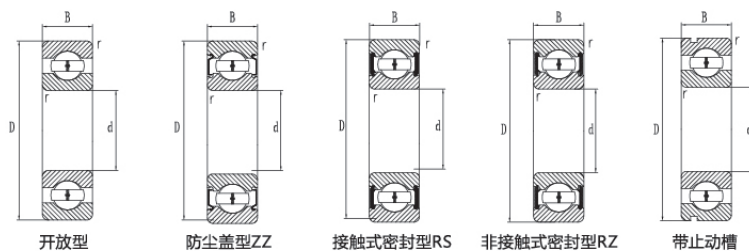

(d95~120mm)

基本尺寸(mm)			倒角尺寸	基本额定负荷KN		极限转速 r/min		质量	公称型号
d	D	B	min	Cr	COr	油润滑	脂润滑	Kg	
95	200	45	3	153	119.00	3900	3300	5.65	6319
	145	16	1	34.5	35.00	5300	4500	0.89	16019
	120	13	1	19.3	20.50	5900	5000	0.3	6819
	130	18	1.1	33.5	33.50	5700	4800	0.61	6919
100	150	24	1.5	60.0	54.00	5000	4200	1.25	6020
	180	34	2.1	122	93.00	4200	3500	3.15	6220
	215	47	3	173	141.00	3700	3200	7	6320
	150	16	1	35.0	36.50	5000	4200	0.91	16020
	125	13	1	19.6	21.20	5600	4800	0.31	6820
	140	20	1.1	41.0	39.50	5300	4500	0.83	6920
105	160	26	2	72.5	65.50	4700	4000	1.6	6021
	190	36	2.1	133	105.00	4000	3400	3.7	6221
	225	49	3	184	153.00	3600	3000	8.25	6321
	160	18	1	52.0	50.50	4700	4000	1.2	16021
	130	13	1	19.8	22.00	5400	4600	0.32	6821
	145	20	1.1	42.5	42.00	5100	4300	0.87	6921
110	170	28	2	82.0	73.00	4500	3800	1.95	6022
	200	38	2.1	144	117.00	3800	3200	4.35	6222
	240	50	3	205	179.00	3400	2900	9.55	6322
	170	19	1	57.5	56.50	4500	3800	1.45	16022
	140	16	1	24.9	28.20	5100	4300	0.6	6822
	150	20	1.1	43.5	44.50	4800	4100	0.9	6922
120	180	28	2	85.0	79.50	4100	3500	2.05	6024
	215	40	2.1	155	131.00	3400	2900	5.15	6224
	260	55	3	207	185.00	3100	2600	12.5	6324
	180	19	1	63.0	63.50	4100	3500	1.6	16024
	150	16	1	28.9	33.00	4700	4000	0.65	6824
	165	22	1.1	53.0	54.00	4400	3800	1.2	6924